

PIEZO BUZZER

Customer	
Customer P/O	
BeStar Model Name	BPT-380XAC24VDC
Product No.	041019
Issue No.	BS/TEP01.342A
Issue Date	03/8/10

Approval:

- 1.Characteristic
- 2.Dimension
- 3.Reliability Test
- 4.Packing



BESTAR ELECTRONICS INDUSTRY CO.,LTD

TianAn Industry Park4/F,Site B ChangZhou New District

Tel:86-519-5103228

Fax:86-519-5131010

Http:www.be-star.com

E-Mail:bestarco@pub.cz.jsinfo.net


BPT-380XAC24VDC(BPT-380XAC24)

1. Characteristic

★Electrical and Mechanical Characteristics

No.	Item	Specifications
1.	Operating Voltage (VDC)	10-28
2.	Rated Voltage (VDC)	24
3.	a) Supply Current (mA)(MAX)	20
4.	a) Sound Pressure Level at 30 cm(dB)(MIN)	95
5.	a) Resonant Frequency(Hz)	2900 ± 500
6.	@Tone Nature	Continuous
7.	Operating Temperature(° C)	-20...+60
8.	Storage Temperature(° C)	-30...+70
	a) Value applying at rated voltage	
	@ Rated Pulse 3 ± 20%Hz	

★Standard Output Measurement Setup

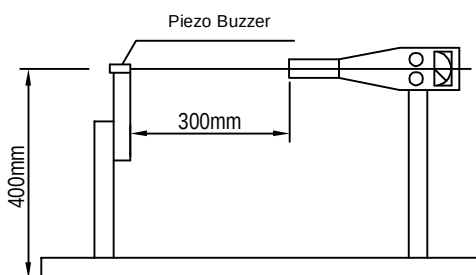

DIS.		DATE		Page:1 of 3
CHEC.		DATE		3rd angle projection
APPR.		DATE		



BESTAR ELECTRONICS INDUSTRY CO.,LTD

TianAn Industry Park 4/F,Site B ChangZhou New District
E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com


BPT-380XAC24VDC

Piezo Buzzer

DRG NO
BS/TEP01.342A

BPT-380XAC24VDC(BPT-380XAC24)

2. Dimension

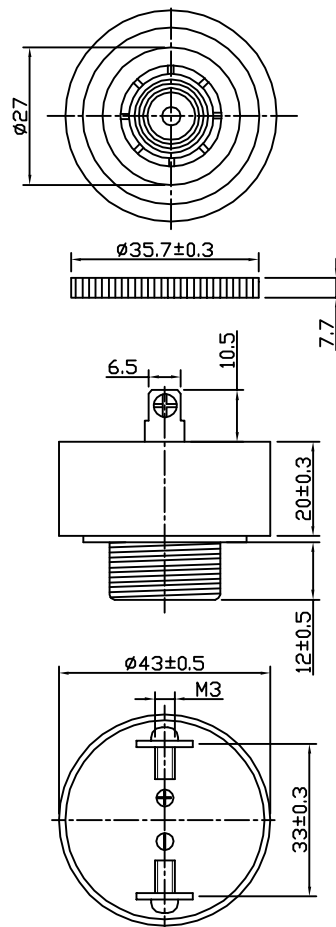

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd.
and shall not be used in whole or in part without its written content

DIS.		DATE		Page:2 of 3	BPT-380XAC24VDC
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.342A
BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					



BPT-380XAC24VDC(BPT-380XAC24)

3. Reliability test

3.1 high temperature test

Temperature +70° C
Duration 96hrs

3.2 low temperature test

Temperature -30° C
Duration 96hrs

3.3 life test in normal temperature

Power supply 24V
Duration 500hrs

3.4 temperature cycle test

Cycles 5

3.5 Humidity cycle test

Cycles 5

all these tests above should be measured after leaving normal temperature for 2hrs.

3.6 Drop test

Height 70cm
(to 10mm thickness woodenboard)
Direction 3

Notice: All specification must be satisfied in this condition.

4.Packing

4.1 Packing Quantity :1pcs per small box
250pcs per carton
carton size 49x25x30cm,

DIS.		DATE		Page:3 of 3	BPT-380XAC24VDC
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.342A



BESTAR ELECTRONICS INDUSTRY CO.,LTD
TianAn Industry Park 4/F,Site B ChangZhou New District
E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com