

DYNAMIC SPEAKER

Product No. *****

BMS2030-11C-08H4.7W

Issue no. BS/TES01.****




Features:

- Loud sound output
- RoHS

BESTAR Holdings Co., Ltd.


www.be-star.com | info@be-star.com

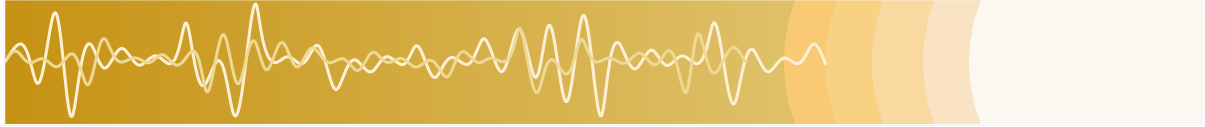

Content:

1 Characteristics	3
1.1 Technical terms	3
1.2 Test method	4
1.3 Frequency Response Curve	5
1.4 Total Harmonic Distortion	6
1.5 R&B Curve	7
2 Dimension	8
3 Reliability Test	9
4 Packing	10
4.1 Packing drawing	11
4.2 Packing quantity	11
5 History change record	12
6 Important Notice	13



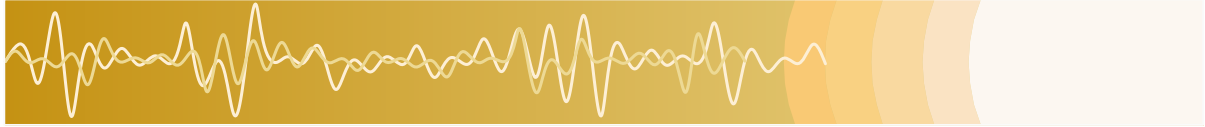


1.Characteristics


1.1Technical terms


1. Size	20*30*4.7mm
2. Impedance at 2KHz	8±15%Ω
3. Lowest Resonance frequency	550±20%Hz at 1V
4. Rated input power	1.0W(2.83V)
5. Maximum input power	1.2W (3.10V)
6. Buzz & Rattle(at sine wave 2.83V)	must be normal between 300-3400Hz
7. SPL	91±3dB (at 1.0K 1.2K 1.5K 2.0KHz in 1W/0.1m average (0dB SPL=20μPa))
8. THD	≤10% (at 2kHz/0.1W/0.1m)
9. Operating temperature	-10...+60℃
10. Storage temperature	-30...+70℃



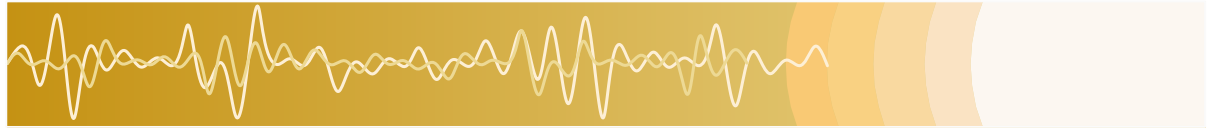


1.2 Test method:

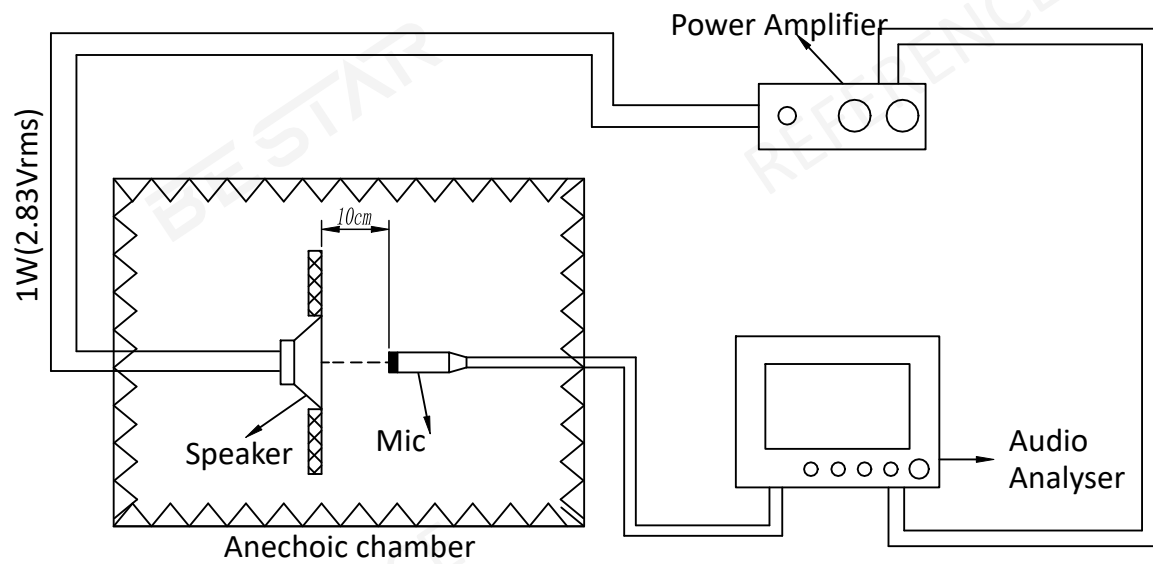

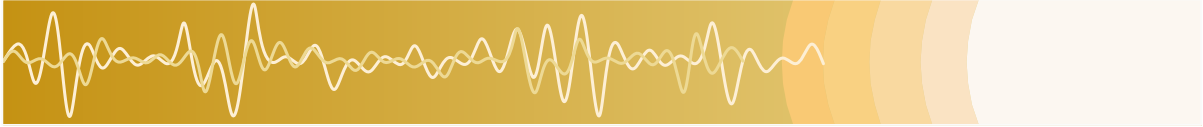

1.3 Frequency Response Curve (only for reference)


A: Frequency Response Magn 0 dB re 20.00 μ Pa/V 1/12Oct

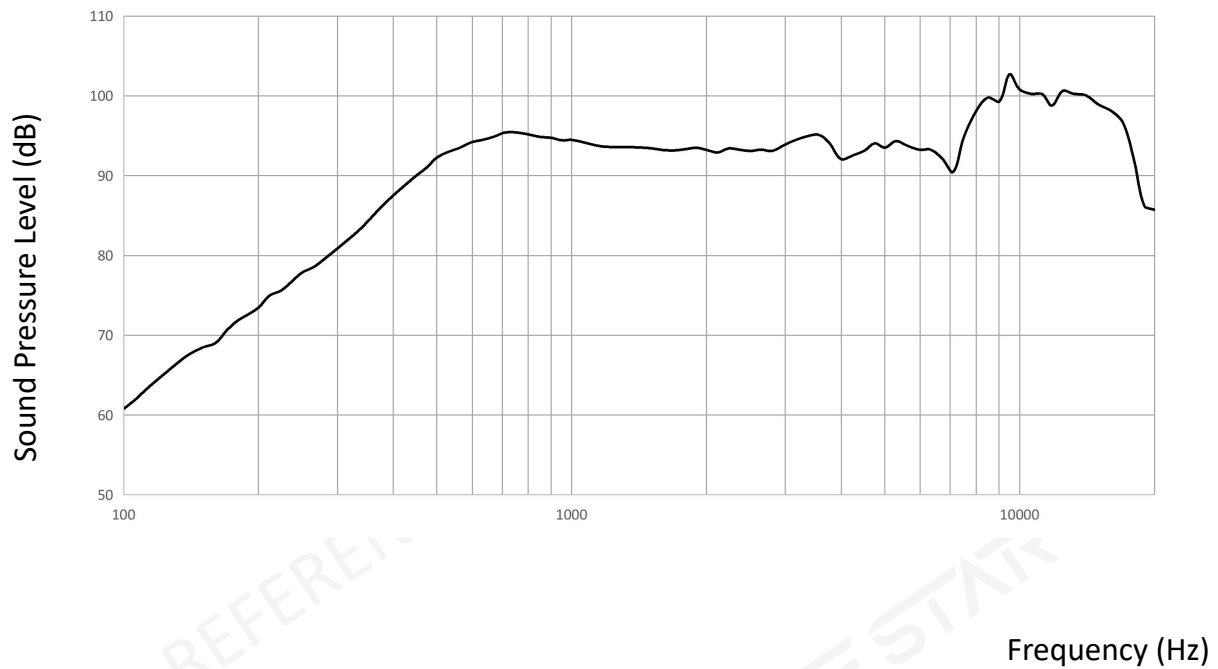

1.3.1 Sensitivity


SPL is expressed in dB rel 20 μ Pa, computed according to IEC 268-5.
Measurement set up according chapter 1.2 and parameters according chapter 1.3



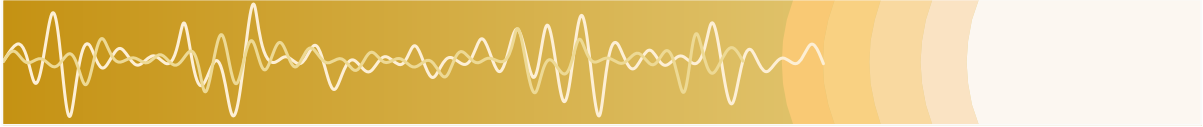

1.4 F0 Curve (only for reference)


A: Frequency Response Magn 0 dB re 20.00 $\mu\text{Pa/V}$ 1/12 Oct

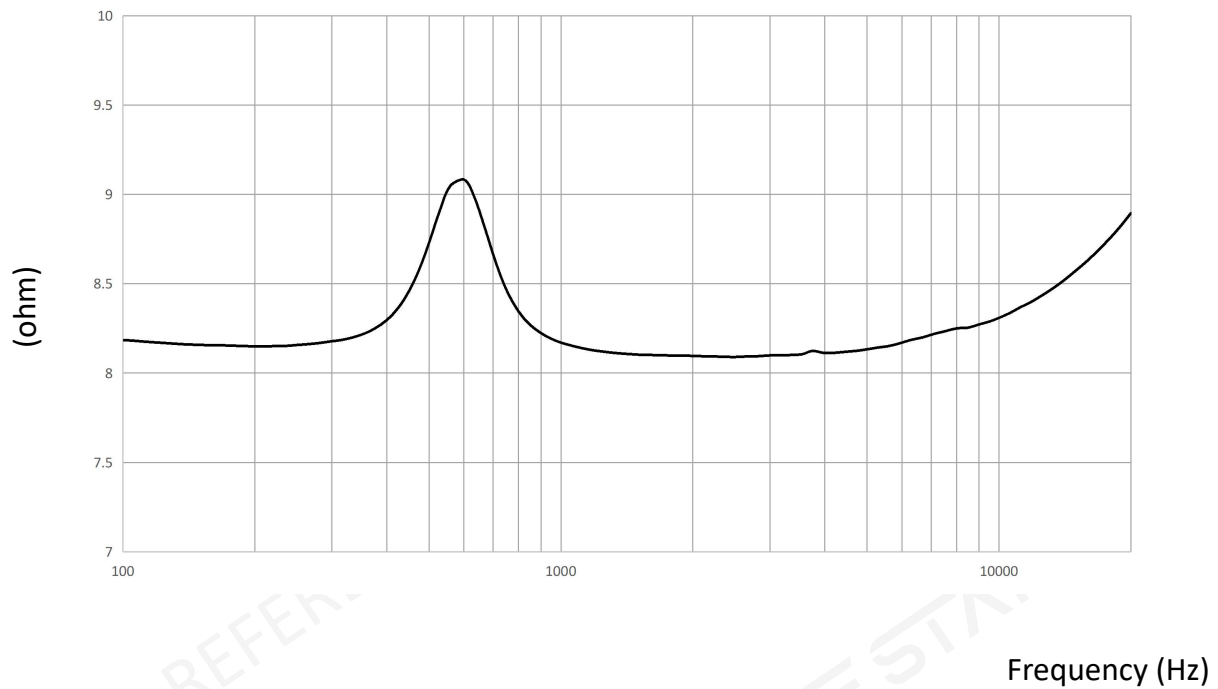

1.4.1 Resonance Frequency


Resonance frequency is measured according test set up in chapter 1.2 and parameters according chapter 1.4



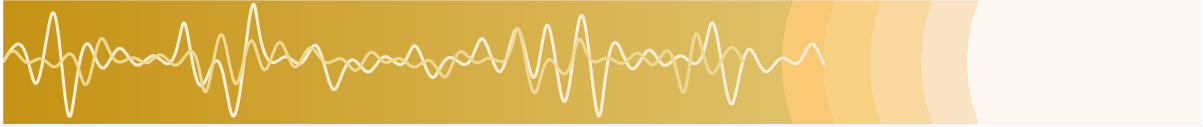

1.5 Total Harmonic Distortion (only for reference)


A: Frequency Response Magn 0 dB re 20.00 μ Pa/V 1/12Oct

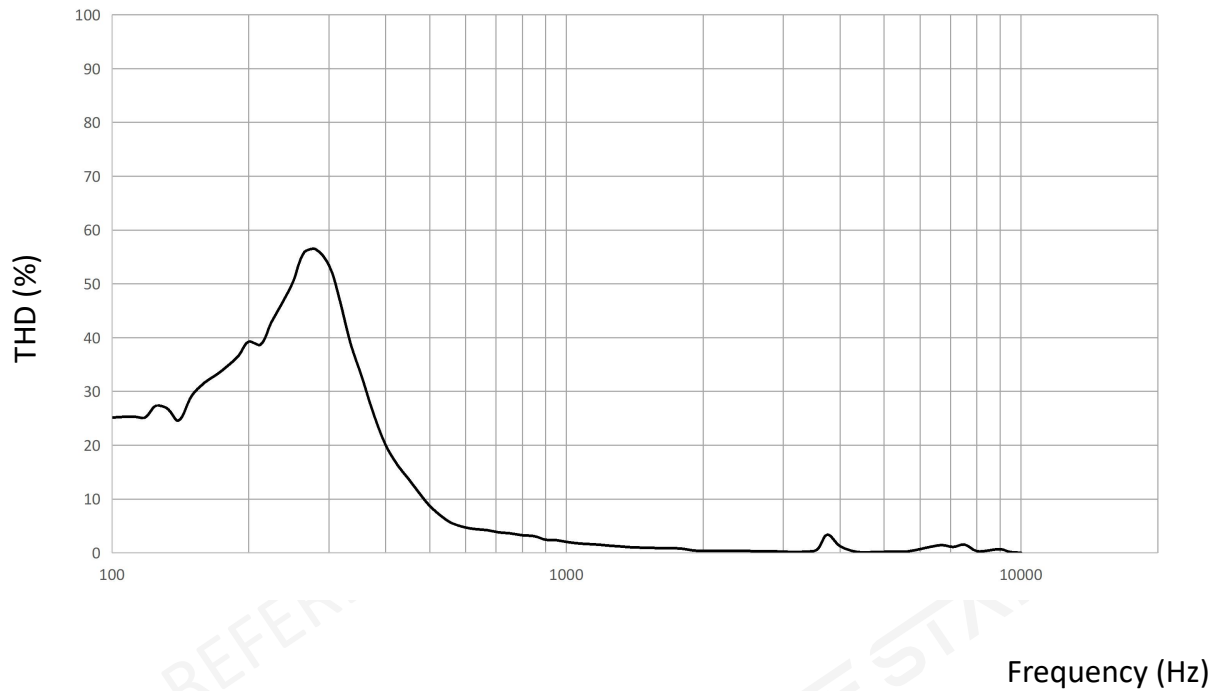

1.5.1 THD


THD is measured according test set up in chapter 1.2 and parameters according chapter 1.5



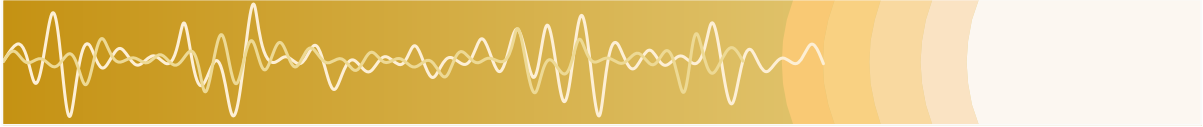

1.6 R&B Curve (only for reference)


A: Frequency Response Magn 0 dB re 20.00 μ Pa/V 1/12Oct

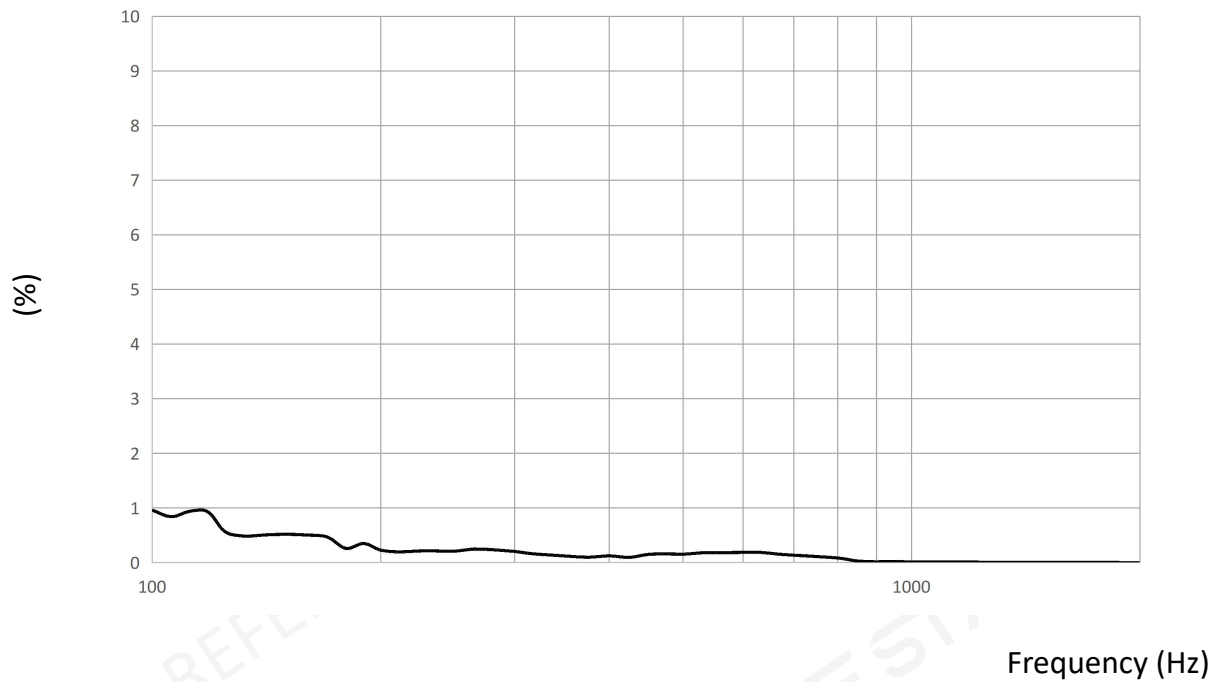


1.6.1 R&B

R&B is measured according test set up in chapter 1.2 and parameters according chapter 1.6



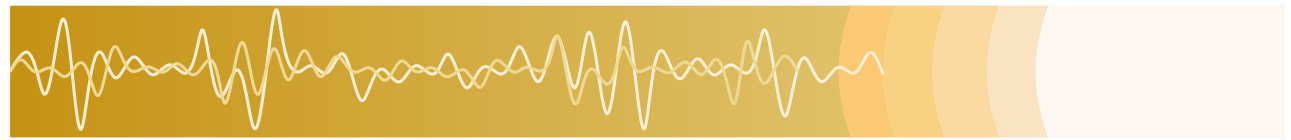


2. Dimension

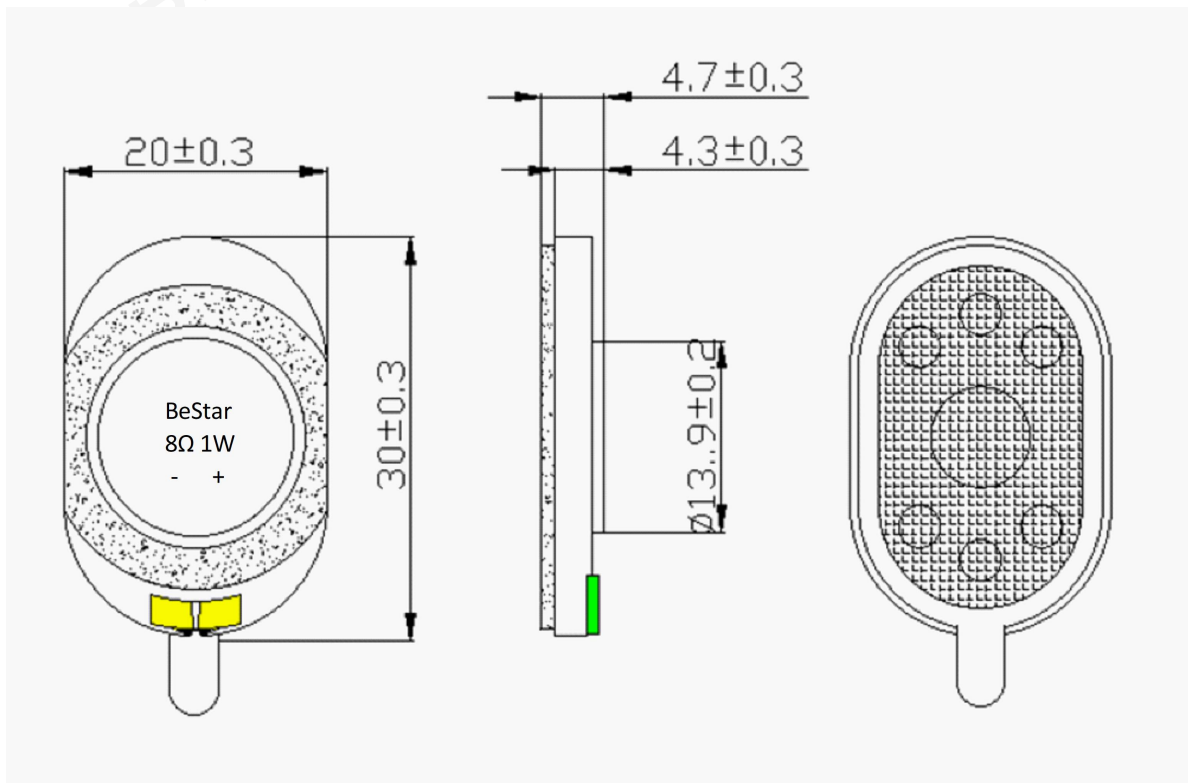

Tolerance: ± 0.5 mm



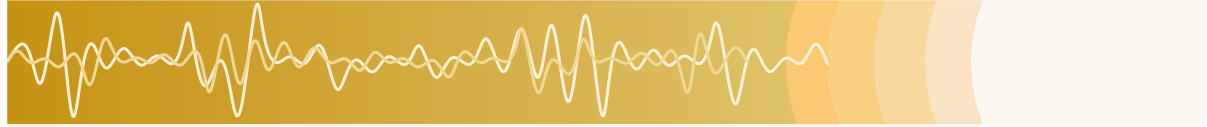

3. Reliability test

3.1 High temperature preservation test

Temperature	+70 °C
Duration	96hrs

3.2 Low temperature preservation test


Temperature	-30 °C
Duration	96hrs

3.3 Humidity Test

Temperature	40±3 °C
Relative Humidity	90%-95%RH
Duration	96hrs

3.4 Thermal Humidity Cycling

The part shall be subjected 10 cycles.

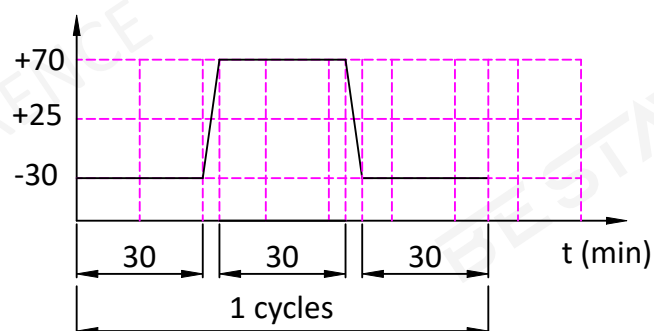


3.6 Drop test

Drop the speaker contained in normal box onto the surface of 20mm thick board 10 times from the height of 100cm.

3.7 Operation Life Test


Must perform normal with program White-Noise source at Rated Power for 96 Hours.



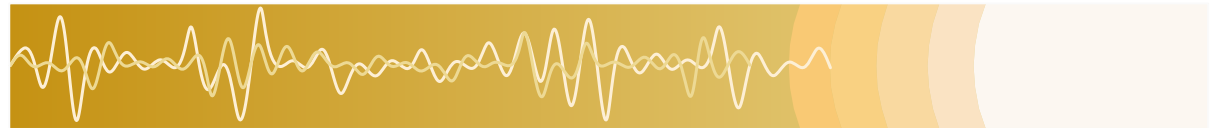

4. Packing


4.1 Packing drawing (unit:cm)

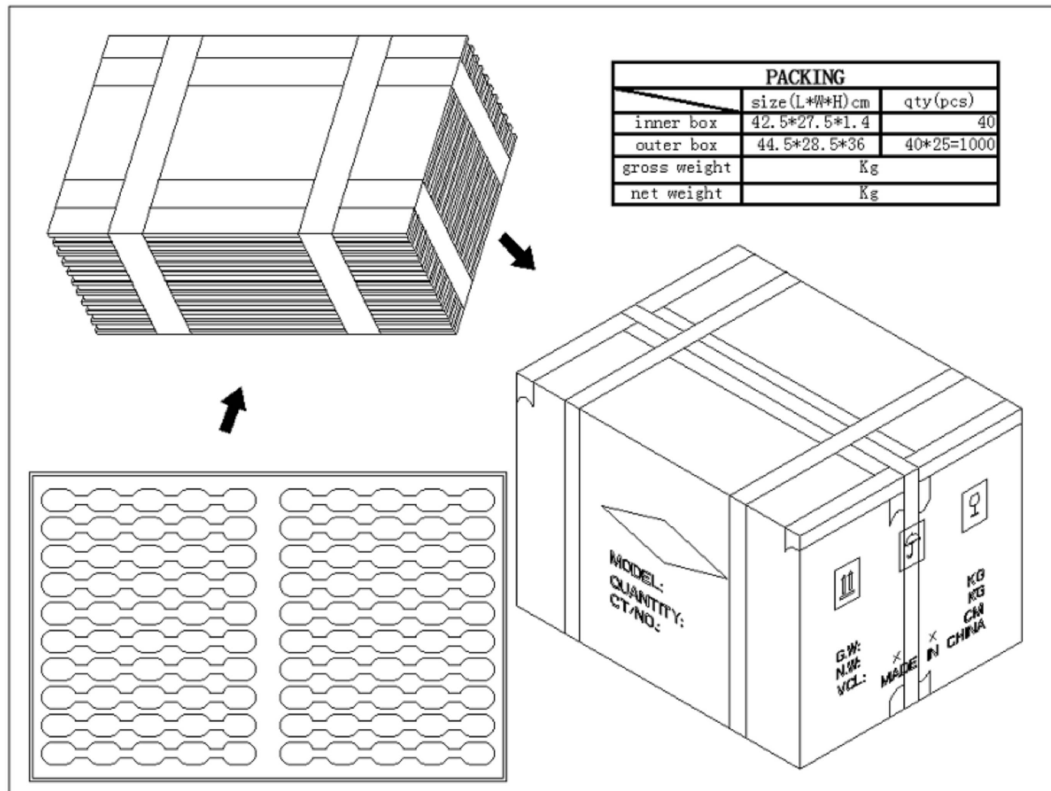

4.2 Packing quantity

- 1) 40pcs per tray
- 2) 25 trays per carton
- 3) 1000pcs per carton
3. carton size: 44.5X28.5X36cm




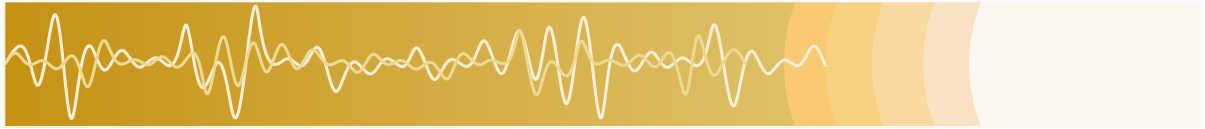

5. History change record

Version	Change Items	Date	Drawn	Checked	Approved
A0	First Edition	2021.01.17	Judy.Yang	Peter.Huang	Jason.Zhang



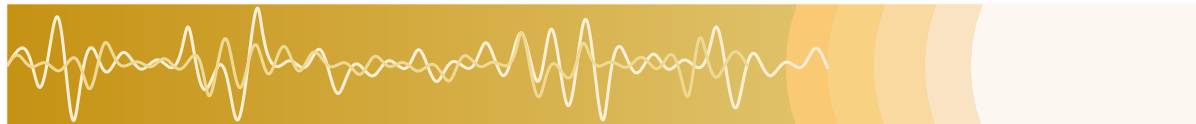

6. Important Notice

6.1 The products mustn't be washed

6.2 Storage Condition (Packaging)

The products should be stored in the room, where the temperature/humidity is stable. And avoid such places where there are large temperature changes. Please store the products at the following conditions: Temperature: -10 to + 40 °C Humidity: 15 to 85% R.H.

6.3 Expire Date on Storage

Expire date (Shelf life) of the products is six months after delivered under the conditions of a sealed and an unopened package. Please use the products within six months after delivered.

If you store the products for a long time (more than six months), use carefully because the products may be degraded in the solderability and/or rusty. Please confirm solderability and characteristics for the products regularly.

6.4 Notice on Product Storage

- (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced at quality, and/or be degraded in the solderability due to the storage in a chemical atmosphere.
- (2) Please use the products immediately after the package is opened, because the characteristics may be reduced at quality, and/or be degraded in the solderability due to storage under the poor condition.

6.5 Rated and Max input power

Rated input power

Rated input power is the maximum (limit) value which can be input to the component intentionally. If the actual input power to component keeps exceeding Rated Input power, it will damage the component acoustic performances and reliability. In the worst case, the component will get broken and no sound.

Max input power

Max input power is the maximum (limit) value for unexpected input power which is caused in the customer's circuit like surge voltage. If the actual input power to component keeps exceeding Maximum input power, it will break the component and cause no sound in a short time. Please note that component will have a risk to get broken if the unexpected input power continues. The value of input power is set based on the sinusoidal power in the normal speaker use. If the special signal is input to component, the values of Rated and Max input power will be different. Please make a well-investigation at your laboratory in the case of the special signal input.

